




Technical Drawing

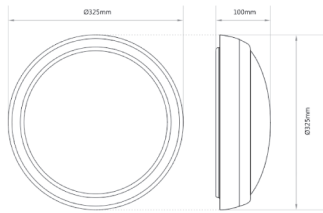

Function Specification

Body : Polycarbonate housing & Opal diffuser
 Mode of operation : Maintained & standard mode(mains only)
 Mains supply : 220 Volts, 50/60Hz

Parameter

Lamp : 10W, 15W LED lamp
 Fluorescent lamp : 22W - 32W (circle lamp)
 Power & Battery : 4.8V4500mAh Ni-Cd batteries pack
 Rated duration : 120 - 180 minutes
 Recharging time : 24 hours

Fields of Application



Standards of Application



Product Details

Order code	Power	Voltage	Dimensions	Pcs/Pack
CST 110107	10W/Led	220-240	325x325x100	10
CST 110108	15W/Led	220-240	350x350x100	10
CST 110501	22W/FL	220-240	325x325x100	10
CST 110502	32W/FL	220-240	350x350x100	10

Emergency Ceiling Luminaires




Function Specification

Body : Polycarbonate housing & Opal diffuser
 Mode of operation : Maintained & standard mode(mains only)
 Mains supply : 220 Volts, 50/60Hz

Parameter

Lamp : 10W, 15W LED lamp
 Fluorescent lamp : 22W - 32W (circle lamp)
 Power & Battery : 4.8V4500mAh Ni-Cd batteries pack
 Rated duration : 120 - 180 minutes
 Recharging time : 24 hours

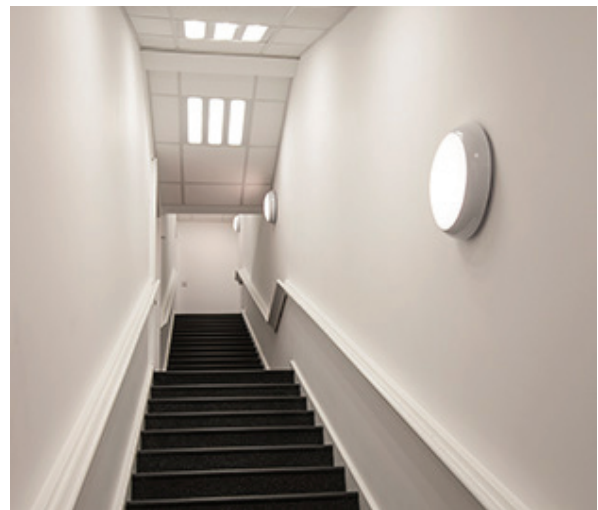

Product Details

Order code	Power	Voltage	Dimensions	Pcs/Pack
CST 110109	10W/Led	220-240	315x315x90	10
CST 110110	15W/Led	220-240	350x350x90	10
CST 110503	22W/FL	220-240	315x315x90	10
CST 110504	32W/FL	220-240	350x350x90	10