
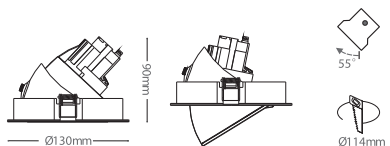


Recessed Mounted Mobile Display Spots

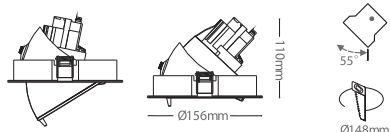

Mechanical Specifications

Electrostatic powder coated, aluminium body. Mobile lamp housings enabling re-direction of light. Suitable for installation in ceiling tiles and drywall ceiling systems

Optical Specifications

"Anodized reflector" maintaining its optical properties throughout lifetime of the luminaire without yellowing or changing colour. Anti-glare, heat and impact resistant, high transmission clear tempered glass.

Electrical Specifications

EN 60238 standard compliant, lampholder with heat resistant electro porcelain body. Non-flammable silicon cable.


Options

Low-loss electronic ballast. Magnetic ballast application.


Fields of Application




Standards of Application



Light Distribution Curve

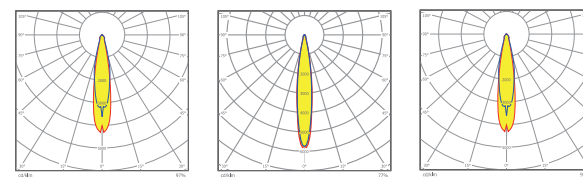

Product Details

Order Code	Power (W)	Lamp Type	Luminous Flux (lm)	Dimensions (mm) a b c	 (mm)	Base	Pcs/Pack	Ral Code
CST 060317	1x50	Halogen	1x8800/1600 cd	-	-	GU5,3	16	9006
CST 060318	1x50	Halogen	1x8800/1600 cd	-	-	GU5,3	16	9006
CST 0603188	1x50	Halogen	1x8800/1600 cd	-	-	GU5,3	16	9006