



Recessed Mounted Display Spots



Technical Drawing



Mechanical Specifications

Electrostatic powder coated aluminium injection frame. Mobile lamp housings enabling re-direction of light.

Optical Specifications

"0,40 mm thick "anodized aluminium reflector" maintaining its optical properties, non-yellowing and non-discolouring throughout lifetime of the luminaire. Anti-glare, heat and impact resistant, high transmission clear tempered glass.


Electrical Specifications

Low-loss electronic ballast. Efficient power factor correction immune to fluctuations in grid voltage and providing constant light output. High-heat resistant silicone cable

Options

Socket application suitable for different rail systems


Light Distribution Curve

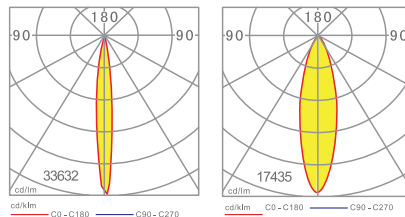


Fields of Application



Standards of Application



Product Details

Order Code	Power (W)	Lamp Type	Luminous Flux (lm)	Dimensions (mm) a b c	 (mm)	Base	Pcs/Pack
CST 060321	1x50	Halogen	1x8800/1600 cd	-	-	GU10-E27	1
CST 060322	2x50	Halogen	2x8800/1600 cd	-	-	GU10-E27	1