




Surface Round LED Down Light



PRODUCT PROFILE

| Order Code | Lumen | Power | Voltage | Beam Angle | CRI |
|-------------------|--------|-------|----------|------------|-------|
| CST_RLDL 00109090 | 1100lm | 10W | 220-240V | 60° | Ra≥90 |
| CST_RLPL 20110120 | 2200lm | 20W | 220-240V | 60° | Ra≥90 |
| CST_RLPL 30130155 | 3300lm | 30W | 220-240V | 60° | Ra≥90 |
| CST_RLPL 40170190 | 4400lm | 40W | 220-240V | 60° | Ra≥90 |
| CST_RLPL 50195195 | 5500lm | 50W | 220-240V | 60° | Ra≥90 |

Optional LED Chip Brands

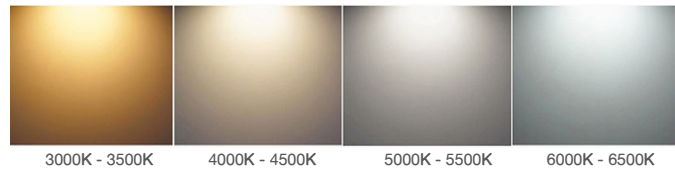


Standards



Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen & CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

Technical Drawing

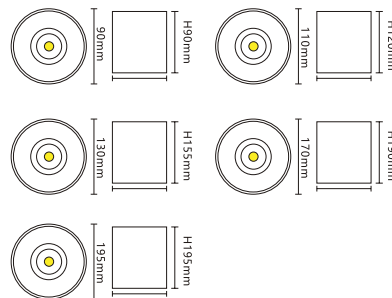

Application



Photometric Data

